

Premium Video PTZ Camera

Specification

Model No.: H3-HAM Series

*3x,10x Optical zoom | 1080p@30fps | UVC1.5
(Single USB Cable)*



Front



Back

Features:

- ⊗ PRO PTZ Camera design
- ⊗ OSD Menu/Lens Menu
- ⊗ Speed Match
- ⊗ UVC Protocol 1.5
- ⊗ IR remote controller unit
- ⊗ USB 2.0 Connection

Performance:

- ⊗ 1920x1080pixels progressive @30fps
- ⊗ 3x or 10x optical zoom lens
- ⊗ HOV84/54 degree
- ⊗ 1/2.9"HD color CMOS Sensor
- ⊗ Pan ± 75 degree Pan movement
- ⊗ Tilt +30 degree, - 30 degree
- ⊗ 64 preset positions
- ⊗ 4 cruise lines
- ⊗ No need Power adaptor

Dimension:

- ⊗ L 350mm x W 112mm x H139mm

Installation:

- ⊗ Desktop
- ⊗ Standard Tripod
- ⊗ 5 meters USB Cable


Remote control unit



- 1) Reset
- 2) Power ON/OFF
- 3) IR Select
- 4) PAN, TILT, Home position
- 5) AUTO, MANUAL, FAR, NEAR
- 6) Zoom in/out
- 7) DOME OSD, LENS OSD
- 8) REV
- 9) SET/CLEAR/CALL Presets
- 10) 1-9 Presets

Single USB Cable connect to PC

USB 2.0 Power supply via USB cable, auxiliary power cable (5 Meters cable)

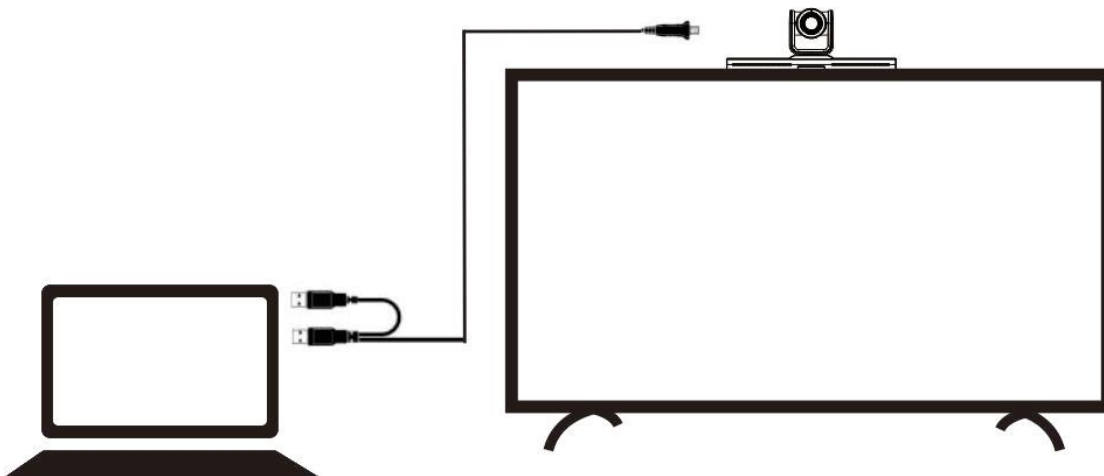

Accessories List:

- 1) 3 meters USB 2.0 Cable
- 2) HD PTZ Camera
- 3) User's manual book
- 4) IR remote control



Specification sheet

Model number:		H3-H3M	H3-HAM
		3X	10X
Image Sensor	Sensor	1/2.9" SONY CMOS	
	Effective pixel	2.1 Megapixel	
	Minimum Scene illumination	0.1Lux at F1.6	
	White Balance	MANUAL/AUTO/ATW/INDOOR/OUTDOOR	
	Gain Control	AUTO	
	Back-light compensation	Support	

	S/N Ratio	>50db	
	IRIS	F1.7-F3.0	F1.6-F2.5
Lens	Focus	f=3.3mm-10mm	f=4.7-47mm
	Zoom	3x Optical Zoom	10x Optical Zoom
	Hov	84 degree	54 degree
Video Output		USB 2.0 Type B	
Video format		MJPEG: 1080P30/25,720P30/25, 640x480, 640x360	
Control Interface		USB	
PTZ Control Protocol		VISCA,PELCO-D,UVC	
Baud Rate		9600/38400bps	
Patrol tours		4	
Preset		64	
OSD Menu		LENS OSD/DOME OSD	
Speed Matching Function		Support	
Image Auto Flip		Support flip/mirror	
Pan Speed		0-40 degrees/s	
Tilt Speed		0-40 degrees/s	
Pan Rotation Angle		0-150 degree	
Tilt Rotation Angle		+ 30, - 30 degree	
Auto Pan Scan		Support	
Remoter Control		IR Wireless remote control P/T/Z	
Power		USB 2.0 Power supply	
Operation Temperature		0℃~50℃	
Environmental humidity		0-95%RH(non-condensaion)	
Length X width X high		L 350mm x W 112mm x H139mm	
Weight		785g	